

K Sales Inc.

972-484-8885


2741 Satsuma #107, Dallas, TX 75229

972-484-1245 fax

k-sales@hotmail.com



Hi-Flow Tank Pumps

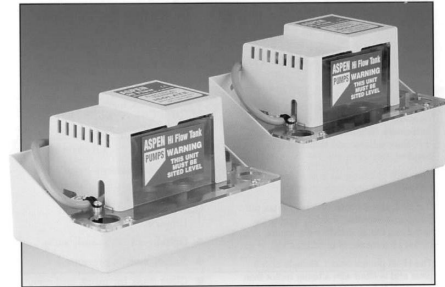

Stock Clearance

LAST CHANCE FOR THESE PRICES

Discounted prices only available on Dallas stock
(while supplies last, no backorders available)

Updated February 2012

The highly competitive ASPEN HI-FLOW TANK PUMPS are designed to collect condensated water from air conditioning machines, refrigeration units, gas boilers etc, and operates when float rises to discharge a head of 13 feet.

The deck of the pump is of clear plastic for quick and easy internal inspection and the plastic casing is unobtrusive and manufactured with a high back for good vertical mounting. It is built with two floats; one to operate the pump and the other has a pre-wired safety switch incorporated to wired into the circuit to prevent water leaks from sensitive installations if necessary.

Both the 1.75 pint pump and 3.5 pint pump have a pumping capacity of 63 gallons/hr.

INSTALLATION NOTES

This tank pump is designed to sit level on its base or be fitted level on a vertical surface.

This pump must be protected by a 5A mains fuse or a 2A anti-surge fuse.

Ensure that there are no kinks or trapped parts in the piping, which must have an I/D of 1/4" and an O/D of 3/8".

Fix the pipe with cable ties to the pump outlet.

TECHNICAL SPECIFICATIONS

- Discharge head, 13 feet max
- Water pumping capacity, 63 gallons/hr max
- Tank capacity 1.75 pints or 3.5 pints
- In-line valve to prevent siphoning back
- Pre-wired safety float switch
- Clear deck for quick and easy inspection
- Incorporated back-plate for vertical mounting
- Pump rating 0.3A, 110V AC
- Auto-resetting thermal cut-out to shaded pole motor
- Connecting cable, 6 ft
- Safety switch 4.0A max
- Fire retardant plastics

Order Number	Description	Net Cost Each	Quantity Remaining
HF1-115	1.7 pints H 5 1/8". W 9 1/4", D 5 1/2". Weight 4lbs.		12
HF2-115	3.5 pints H 6 1/2". W 9 1/4", D 5 1/2". Weight 4lbs.		13

ELECTRICAL CONNECTIONS:

White -Live Black -Neutral Green/Yellow -Earth Blue + Brown -Safety Switch

SERVICE GUIDE:

Flush the pump thoroughly with anti-bacterial wash every 6 months to avoid sludge build-up in the pump housing.